


# 0001-WiBeee ~ WiFi Power Meter

## Description

**WiBeee** equipment is designed to be simple to install and with performance above equipment of the same competitive range.

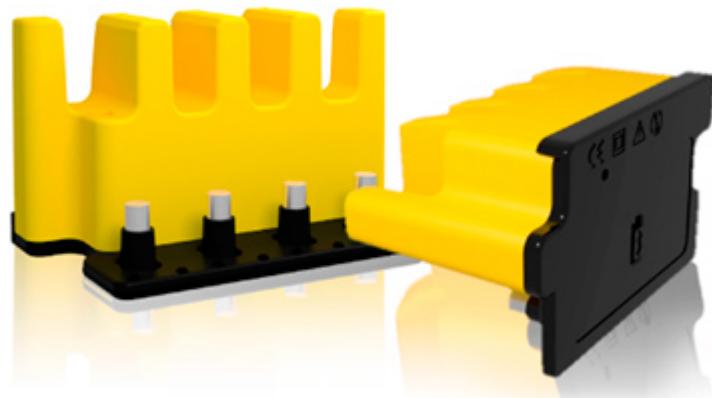

It is specially designed for the control of the electric consumptions in medium / large establishments in which a modification of the facilities to house a conventional network analyzer is complicated by the implications of space and wiring that their placement implies.

It is an ideal equipment for the segregation of consumption from the general picture, since its easy installation and low cost make of \*WiBeee\* a very interesting product for these tasks.

The communication of \*WiBeee\* equipment is done through a WiFi connection from the equipment itself, without the need for walkways or other equipment, we simply configure the access point to access the Internet and the equipment will do the rest.

If installation is done in the same distribution box without needing to occupy space for its placement since its design is optimized to be placed on the magnetotellers of the installation itself.

This feature allows placement in any existing cabinet without its installation involving any changes in the layout of the magnetothermal or in the wiring, since the equipment itself uses the terminals of the magnetothermal for its power.

## Parameters

Parameter	Minimum	Typical	Maximum	Unity
Power Supply	85	230	265	VAC (F-N)
Consumption	5	17	19	mA
Frecuency	50		60	Hz
Measure	85		265	VAC (F-N)
	0		65	A

Parameter	Minimum	Typical	Maximum	Unity
Precision		2		%
Work Temperature	-25		45	°C
Humidity	5		95	%Hr
Maximum Altitude			2000	m
Comunications		WiFi (IEEE 802.11)		
frequency Range	2,405		2,480	GHz

## Connection

## Startup

## Configuration

## Use

From:

<http://doc.caixadesoft.es/> - Documentación

Permanent link:

<http://doc.caixadesoft.es/doku.php?id=en:0001:wibeee&rev=1507401273>

Last update: **07/10/2017 18:34**

